SERIE 60

Bain marie





Technical features


Front drain tap with ball tap. Stainless steel tank.
Gastronorm basin capacity h 150mm,1/2+1/3 for MG/ME046-03-003, 1/1+1/4+1/4 for MG/MEG066-03-006
Gas Heating: stainless steel burner with self –stabilised flame. Thermostatic adjustement of temperature with safety valve and thermocouple. Automatic lighting with pilot burner and piezoelectric device
Electric Heating: stainless stell resistors. Thermostatic adjustement of temperature with warning light for control of functioning and temperature

	DIMENSIONS	PAN DIMENSIONS	POWER		WEIGHT
	W x D x H cm	W x D x H cm	GAS kW	ELECTRIC kW	kg
GAS					
MG046-03-003	40 x 60 x 27/46	30,5 x 42,5 x 17,5	2,1		22
MG066-03-006	60 x 60 x 27/46	51 x 47 x 17,5	5		30
ELECTRIC					
ME046-03-003	40 x 60 x 27/46	30,5 x 42,5 x 17,5		1,5	22
ME066-03-006	60 x 60 x 27/46	51 x 47 x 17,5		3	30


SERIE 60


INSTALLATION DIAGRAM


MG046-03-003

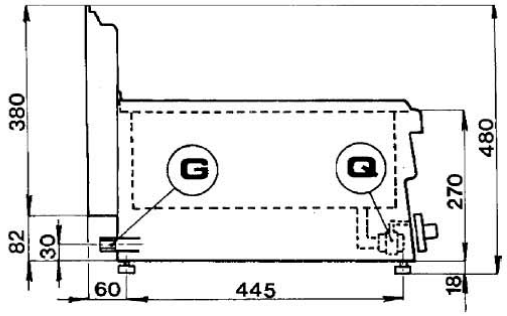

MG066-03-006

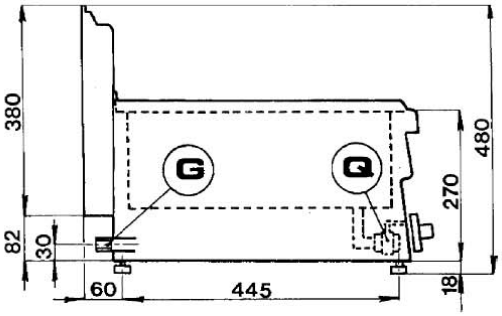

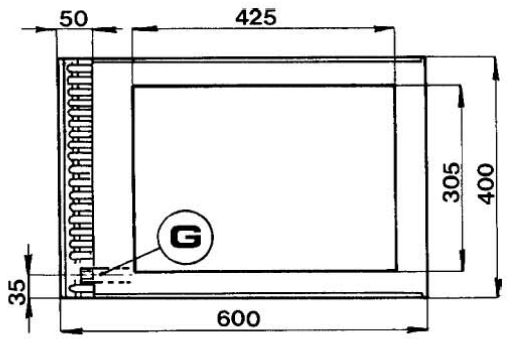


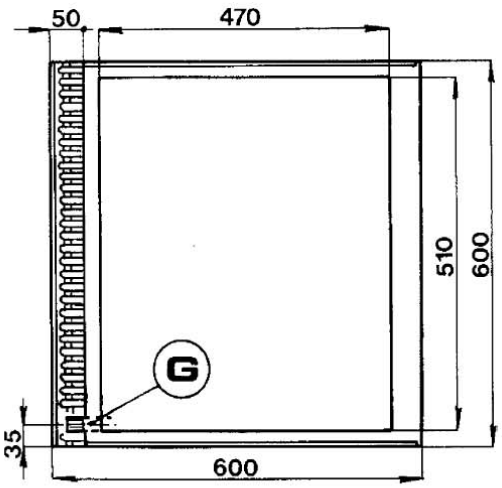



G) Attacco gas G 1/2"
Gas Connection G 1/2"
Raccord gaz G 1/2"
Gasanschluß G 1/2"
Toma de gas G 1/2"

Q) Rubinetto scarico vasca
Tub drain tap
Robinet de vidange du bac
Wannenauslaufhahn
Grifo de vaciado del recipiente


SERIE 60

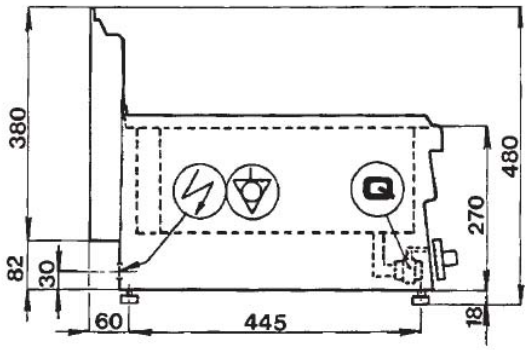

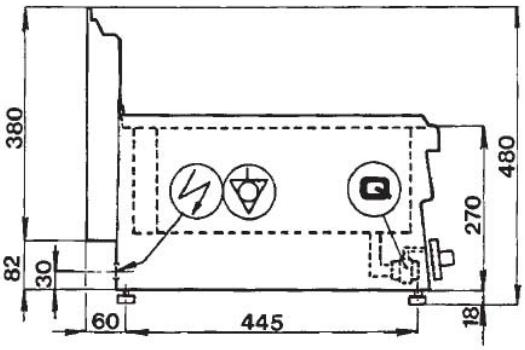

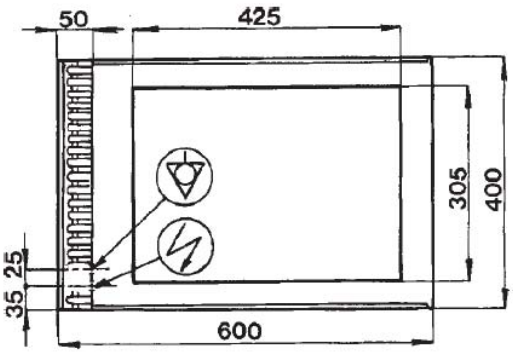

ME046-03-003

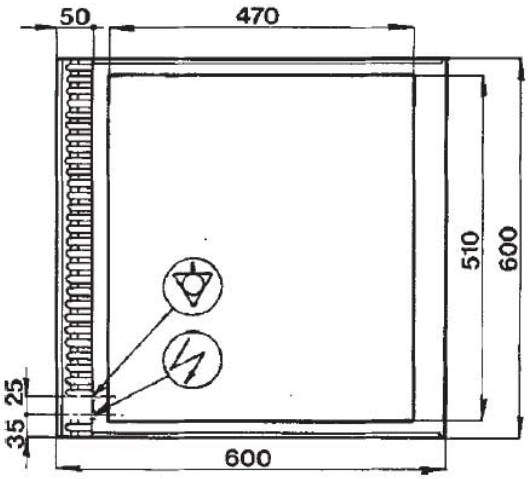

ME066-03-006

Equipotenziale
Equipotential
Equipotentiel
Äquipotential
Equipotencial

Ingresso cavo d'alimentazione
Supply cable inlet
Entrée câble d'alimentation
Speisekabeleingang
Entrada cable de alimentación

All the information in this document is not binding. Eurotec div. Dexion reserves the right to make changes without notice